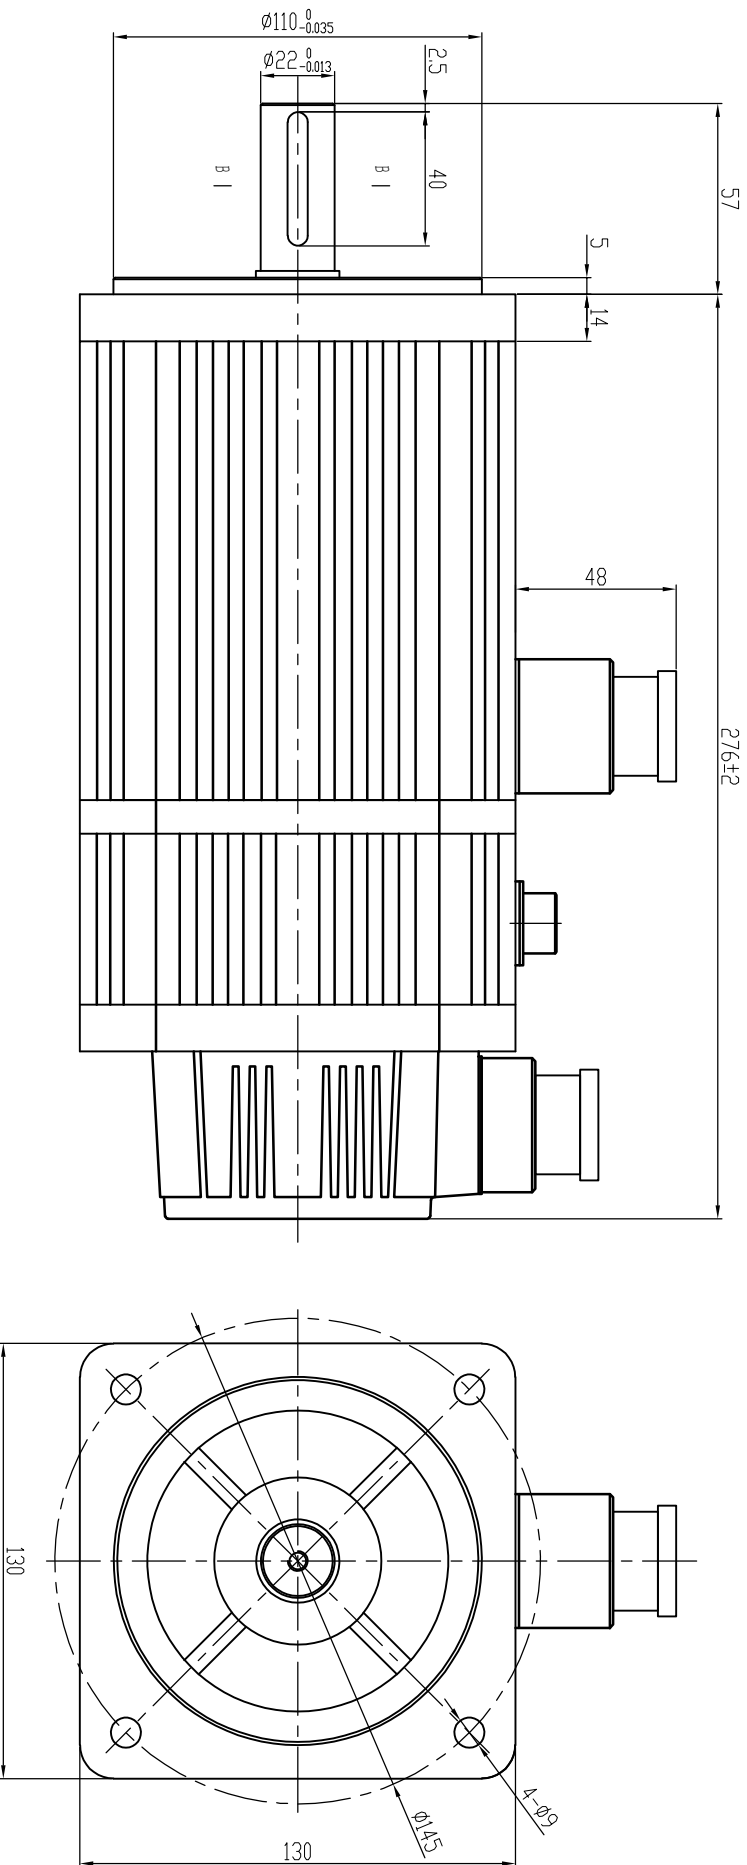


额定电压	220	V
额定功率	1500	W
额定电流	6 $\pm$ 10%	A
额定转矩	10	N $\cdot$ m
峰值转矩	25	N $\cdot$ m
额定转速	1500 $\pm$ 10%	RPM
线电阻	1.5	Ω
线电感	5.37	mH
转动惯量	19.4	10 ⁻⁴ kg $\cdot$ m ²
力矩系数	1.67	Nm/A
转子极对数	4 p	
电机绝缘等级	Class F	
防护等级	IP65	

CONFIRMED/ACCEPTED BY CUSTOMER (客户确认/接受)				CONFIRMED/ACCEPTED BY CUSTOMER (客户确认/接受)			
COMPANY CHIEF SIGNATURE (盖章/签名)				COMPANY CHIEF SIGNATURE (盖章/签名)			
一般公差 TOLERANCE				一般公差 TOLERANCE			
±0.3/±3°				±0.3/±3°			
制图/DRAWN				制图/DRAWN			
设计/DESIGNED				设计/DESIGNED			
审核/CHECKED				审核/CHECKED			
承认/APPROVED				承认/APPROVED			
比例 SCALE				比例 SCALE			
单位 UNIT				单位 UNIT			
变更番号				变更番号			
变更内容				变更内容			
设计				设计			
备注 NOTE				备注 NOTE			
REV. A				REV. A			
物料号				物料号			
型号				型号			
130SFM-C10015-2B1-Z				130SFM-C10015-2B1-Z			
THIRD ANGLE PROJECTION				THIRD ANGLE PROJECTION			
1/1				1/1			

电机绕组插座						
端子序号	2	3	4	1		
功能定义	U	V	W	PE		
绝对值式接线						
端子序号	1	2	3	4	5	6
功能定义	D024V	-	功能定义	PE	E-	E+
制动接线						
端子序号	1	2	3	4	5	6
功能定义	D024V	-	功能定义	PE	E-	E+

智能伺服电机规格						
品名						
物料号						
型号						
130SFM-C10015-2B1-Z						
THIRD ANGLE PROJECTION						
1/1						