
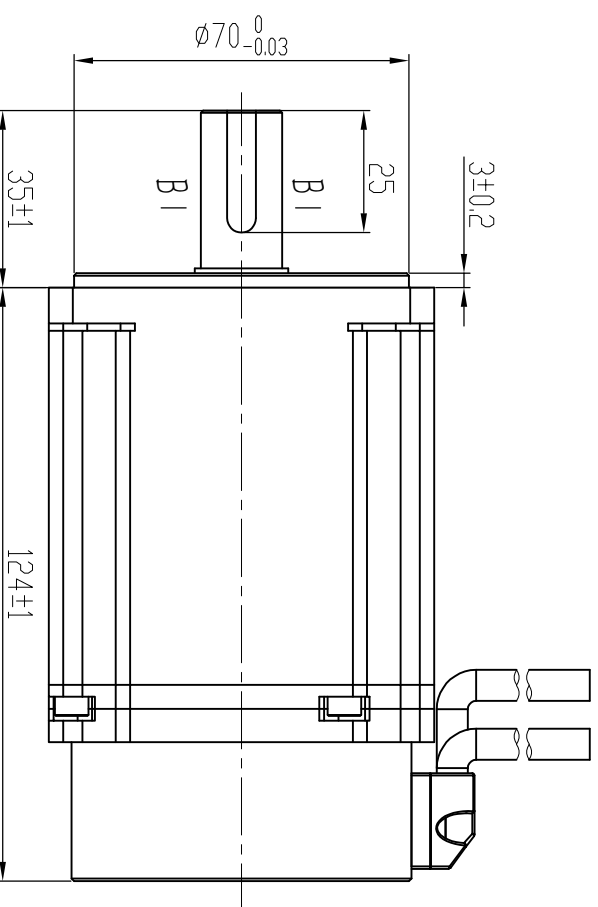


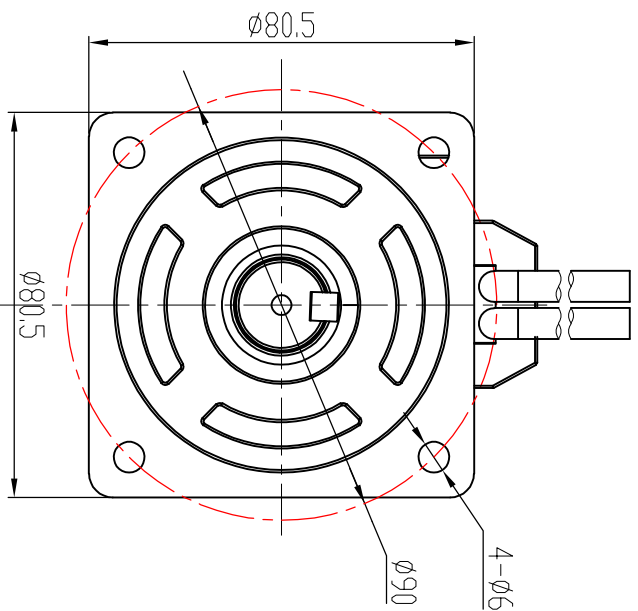

电机绕组插座				
端子序号	1	2	3	4
功能定义	U	V	W	PE

绝对值式接线

端子序号	1	2	3	4	5	6	7
功能定义	PE	E-	E+	SD-	0V	SD+	5V

Technical drawing of a cross-section of a bolt and nut assembly. The drawing shows a bolt with a diameter of 19 mm (tolerance 0 to -0.013) and a length of 15.5 mm (tolerance 0 to -0.1). The bolt is threaded with an M5*10 thread. The nut has a diameter of 6 mm (tolerance 0 to -0.036). The drawing is labeled "B-B (2:1)".

额定电压	220	V AC
额定功率	400	W
额定电流	2	A
额定转矩	1.27	N·m
最大转矩	3.8	N·m
额定转速	3000±10%	RPM
线反电势常数	40	V/KRPM
线电阻	4.6	Ω
线电感	8.1	mH
转动惯量	1.05	10 ⁻⁴ kg·m ²
力矩系数	0.64	Nm/A
电气时间常数	1.76	ms
转子极对数	4 p	
电机绝缘等级	Class F	
防护等级	IP65	

CONFIRMED/ACCEPTED BY CUSTOMER (客户确认/接受)										品名
COMPANY CHOPKINSIGNATURE (盖章&签名)										电机规格书
一般公差 TOLERANCE		$\pm 0.3/\pm 3^{\circ}$	版本	年 月 日	变更番号	变 更 内 容	设计	备 注 NOTE		REV. A
制 图 / DRAWN										三视图 THIRD ANGLE PROJECTION
设计 / DESIGNED						物料号				
审核 / CHECKED						单 位 UNIT	mm	型 号	80SFM-C01330-2B1	
承 认 / APPROVED										1/1
上海四联电机制造有限公司										页 SHEET